


ULTRA-PRO® TRIBECA

UNDER FLOOR HEATING SYSTEM

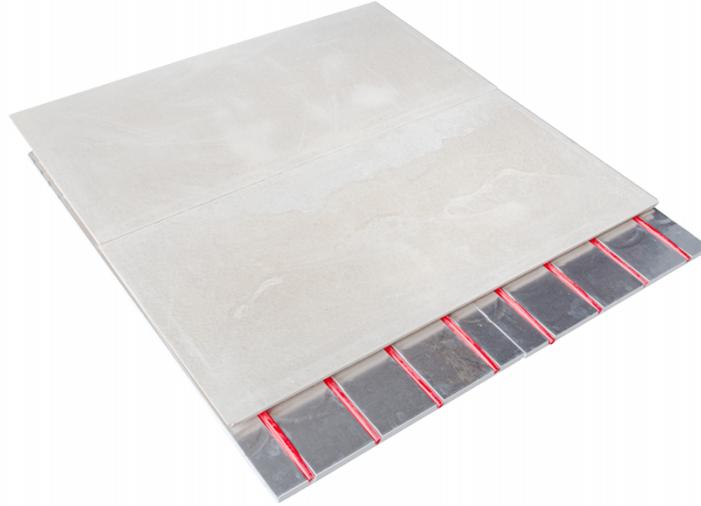

TECHNICAL SPECIFICATIONS

Standard Dimensions	Top Panel: 1200mm x 600mm x 10mm / 18mm Bottom Panel: 1200mm x 600mm x 16mm / 20
Pipe centres	150mm. (accommodates 12mm or 16mm pipe)
Density	Bottom: 42kg/m ³ . Top: 1150kg/m ³
Reaction to fire	A2 (13EN-13501-1)
Swelling after 24hrs contact with water	<2%
BBA Certificate	90/2439
European Technical approval	ISO 9001 / ISO 14001 / 2015

BENEFITS OF OVERLAY PANELS

- ✓ High performance underfloor heating system
- ✓ Low profile 26mm – 40mm (with gypsum overlay), Reduces impact on floor heights
- ✓ Dry installation accelerates project times
- ✓ Improves impact and airborne sound
- ✓ Routed for 12mm or 16mm pipe at 150mm centres
- ✓ Solid Finish
- ✓ High precision engineered panel



MGO-LTD
Clavering, Essex.
CB11 4PW.
TEL: 01799 550222.
Web: www.mgo-ltd.com



ULTRA-PRO
Innovation In Flooring